

MORITZ EDH AR SERIES



That if thou shalt confess with thy mouth the Lord Jesus, and shalt believe in thine heart that God hath raised him from the dead, thou shalt be saved. Romans 10:9 KJV

BUILT
TO LAST
PERFORMANCE

DLH SERIES



ELH AR SERIES



ELH GT SERIES



ELH HT SERIES



FH SERIES



FH+10 SERIES



TBA SERIES



TB SERIES





EDH AR - 20+4 16000 LB GVWR

(16000 lb GVWR built with two 8000 lb axles)

- **Heavy Duty 4" Aluminum Channel Ramps (standard)**
- **Aluminum Tool Box (standard)**
- **17.5" Tires & Wheels**



Step to
Access Deck



Aluminum
Tool Box




Heavy Duty 4" Channel Aluminum Ramps
These Ramps Tested Stronger Than our 3" Steel Channel
Ramps on our Previous Model



EDH - 18 14000 LB GVWR
(14000 lb GVWR built with two 7000 lb axles)

- **EDH No Tail (Optional)**

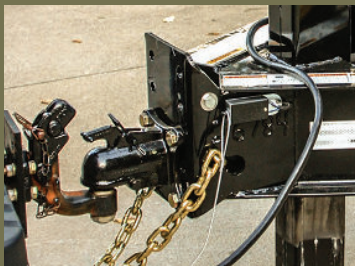

**Heavy Duty
4 Bolt Adjustable
Coupler**



**Optional
Traction Angles
Across Tail**



**Optional
Under Body
Tool Box**



**Optional
Hydraulic Jack**

STANDARD SPECIFICATIONS

deck height	33"
deck width	100"
frame	8" I-beam
stake pockets	3" x 1/4" formed bar
tool box	aluminum diamond plate
ramps	aluminum 4" channel
fenders	3/16" steel diamond plate
suspension	rubber ride (low maintenance)
brakes	electric (all wheels)
tires & wheels	
	12000 lb & 14000 lb GVWR - 16" 10 ply rated 8 bolt
	16000 lb GVWR - 17.5" 16 ply rated 8 bolt
jack	12000 lb
coupler	2-5/16" adjustable (4 bolt)
safety chains	3/8" with latch hook
lights & wiring	LED lights & sealed wire harness
2 year limited warranty (see warranty for details)	

OPTIONS

under body tool box
hydraulic jack
pintle ring
split mesh gates (made from steel)
pallet fork holder
traction angles across tail
pipe spools
solar panel with hydraulic jack
spare tire & wheel

COLORS black - red - charcoal

FRAME SPECIFICATIONS

frame & tongue		cross members				fenders	
8" I-beam		3" channel (12k & 14K 24" Center) (16k 16" centers)				3/16" steel diamond plate	
18' Bumper Pull		20' Bumper Pull		22' Bumper Pull		24' Bumper Pull	
GVWR	beam specs	GVWR	beam specs	GVWR	beam specs	GVWR	beam specs
12000	8" @ 10 lb/ft	12000	8" @ 10 lb/ft	12000	8" @ 15 lb/ft	12000	8" @ 15 lb/ft
14000	8" @ 10 lb/ft	14000	8" @ 10 lb/ft	14000	8" @ 15 lb/ft	14000	8" @ 15 lb/ft
16000	8" @ 15 lb/ft	16000	8" @ 15 lb/ft	16000	8" @ 15 lb/ft	16000	8" @ 15 lb/ft

AXLE SPECIFICATIONS (rubber ride suspension)

GVWR	axles
12000 lb	6000 lb with electric brakes & easy lube spindles
14000 lb	7000 lb with electric brakes & easy lube spindles
16000 lb	8000 lb with electric brakes & easy lube spindles

WEIGHT SPECIFICATIONS

Length	Bumper Pull (Tail)			Bumper Pull (No Tail)		
	12000 GVWR	14000 GVWR	16000 GVWR	12000 GVWR	14000 GVWR	16000 GVWR
18'	3560 lbs	3580 lbs	3990 lbs	2860 lbs	2880 lbs	3350 lbs
20'	3955 lbs	3975 lbs	4520 lbs	3270 lbs	3340 lbs	3810 lbs
22'	N/A	4500 lbs	4970 lbs	N/A	3800 lbs	4270 lbs
24'	N/A	4950 lbs	5420 lbs	N/A	4260 lbs	4720 lbs



MORITZ MORITZ INTERNATIONAL, INC.
 665 North Main Street, Mansfield, Ohio 44902
 Phone (419)526-5222 www.moritzint.com