

MORITZ

TRAILERS & TRUCK BODIES

ELH HT

SERIES



But he said, Yea rather, blessed are they that hear the word of God, and keep it. Luke 11:28 KJV

BUILT
TO LAST
PERFORMANCE

TBA SERIES



DLH SERIES



ELH GT SERIES



FH SERIES



FH+10 SERIES



UDC SERIES



LRA SERIES



CR SERIES





ELGH HT - 22 16000 LB GVWR
(16000 lb GVWR built with two 8000 lb axles)


- 66" Hydraulic Tail
- Fender Tool Box *(optional)*



Cold Formed
8" I Beam



Aluminum
Tool Box

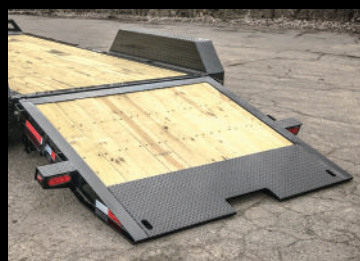

Hydraulic Tail with
Autolock System



Tie Down Slot in Tail



Tie Down
Between Fenders
(flush w/deck & fenders)



ELBH HT - 22 16000 LB GVWR
(16000 lb GVWR built with two 8000 lb axles)

- 66" Hydraulic Tail
- 17.5" Tires & Wheels



Heavy Duty
4" x 1/4" Bar
Stake Pockets



Step To
Access Deck



Heavy Duty
4 Bolt Adjustable
Coupler



Optional
Fender Tool Boxes
(ratchet boomer storage)



Optional
Hydraulic Jack

STANDARD SPECIFICATIONS

deck height	22" to 23"
between fenders	81-1/2"
frame	8" cold formed I-beam
stake pockets	4" x 1/4" formed bar
tool box	aluminum diamond plate
Hydraulic Tail	66" long
Loading Angle	18 degrees
fenders	1/8" steel diamond plate
suspension	rubber ride (low maintenance)
brakes	electric (all wheels)
tires & wheels	12000 lb & 14000 lb GVWR - 16" 10 ply rated 8 bolt 16000 lb GVWR - 17.5" 16 ply rated 8 bolt
jack	12000 lb
coupler	2-5/16" adjustable (4 bolt)
safety chains	3/8" with latch hook
lights & wiring	LED lights & sealed wire harness
2 year limited warranty (see warranty for details)	

OPTIONS

fenders with built in tool boxes
hydraulic jack
pintle ring
wireless remote control
winch mount
winch mount with 8000 lb. electric winch
pallet fork holder
spare tire & wheel

COLORS black - red - charcoal

FRAME SPECIFICATIONS

frame & tongue		cross members		fenders		
one piece cold formed 8" I-beam		3" channel on 16" centers		1/8" steel diamond plate		
20' Bumper Pull			22' Bumper Pull		All Goosenecks	
GVWR	beam specs		GVWR	beam specs		
12000	8" @ 10 lb/ft		12000	8" @ 15 lb/ft		
14000	8" @ 10 lb/ft		14000	8" @ 15 lb/ft		
16000	8" @ 15 lb/ft		16000	8" @ 15 lb/ft		

AXLE SPECIFICATIONS (rubber ride suspension)

GVWR	axles
12000 lb	6000 lb with electric brakes & easy lube spindles
14000 lb	7000 lb with electric brakes & easy lube spindles
16000 lb	8000 lb with electric brakes & oil bath hubs

WEIGHT SPECIFICATIONS

Bumper Pull	Gooseneck						
	Length	12000 GVWR	14000 GVWR	16000 GVWR	12000 GVWR	14000 GVWR	16000 GVWR
20'		3340 lbs	3360 lbs	3800 lbs	4120 lbs	4140 lbs	4580 lbs
22'		3680 lbs	3700 lbs	4140 lbs	4460 lbs	4480 lbs	4920 lbs



MORITZ
TRAILERS & TRUCK BODIES

MORITZ INTERNATIONAL, INC.
665 North Main Street, Mansfield, Ohio 44902
Phone (419)526-5222 www.moritzint.com