


# MORITZ DLH SERIES



Taste and see that the Lord is good: blessed is the man that trusteth in him. Psalm 34:8 KJV

BUILT  
TO LAST  
PERFORMANCE

DLH SERIES



ELH AR SERIES



ELH GT SERIES



ELH HT SERIES



FDH DT SERIES



FDH HT SERIES



TBA SERIES



TB SERIES






- 10 Gauge Sides and Floor
- 24" High Sides
- 6'-9-1/2" and 6'-1-1/2" Inside Bed Widths
- 8" Cold Formed I Beam Frame
- Rubber Ride Axles
- Aluminum Tool Box w/Storage
- Scissors Hoist on 12' and 14' Lengths
- 11 Gauge Diamond Plate Fenders



**Aluminum Tool Box with Storage Area**  
(steel box on gooseneck)

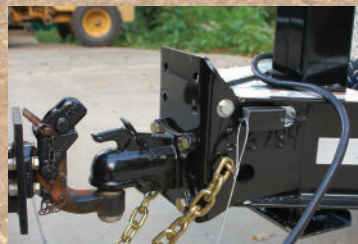

**Heavy Duty Adjustable Coupler**  
(4 bolt)



**Scissors Hoist Standard on 12' & 14'**  
(cylinder on 10')




**Step for Bed Access**



**Tarp Option**



Aluminum Ramps



Hydraulic Jack  
Option



Gate Hold Backs



Trip Lever  
Option



8" I Beam Frame



1/8" Fenders



**STANDARD SPECIFICATIONS**

sidewalls & floor	10 gauge (thickness of steel)
height of sidewall	24"
width inside body	73-1/2" & 81-1/2"
frame	8" cold formed I-beam
tool box	aluminum diamond plate w/storage area
gate	double acting with metering chains
fenders	1/8" steel diamond plate
hydraulic lift	scissors hoist 12' & 14' - cylinder 10'
hydraulic pump	power up/power down
suspension	rubber ride (low maintenance)
brakes	electric (all wheels)
tires & wheels	9950 GVWR - 15" 8 ply rated - 6 bolt
(all tires are radial)	12000 & 14000 GVWR 16" 10 ply rated
	8 bolt
jack	7000 lb. 10' & 12' - 10000 lb. 14'
coupler	2-5/16" adjustable (4 bolt)
safety chains	3/8" with latch hook
lights & wiring	LED lights & sealed wire harness
aluminum ramps	15-1/2" wide x 72" long
warranty	2 year limited (see warranty for details)
other standard features	step to access inside bed
	d-rings inside bed
	gate hold back latches

**OPTIONS**

available rating	9950, 12000, 14000 & 16000 GVWR
pinle ring	
tarp	
stake pockets	
trip lever (forward pull)	for tailgating
jack upgrade	7k to 10k (10k standard on 14' bumper pulls and all goosenecks)
jack upgrade	hydraulic jack (power up/power down)
wireless remote	operates hydraulics wirelessly
pallet fork holders	
spare tire & wheel	

**COLORS** black - red - charcoal

**DUMP BODY VOLUME**

length	width	volume (cubic yard)
10'	73-1/2"	4.5
10'	81-1/2"	5
12'	81-1/2"	6
14'	81-1/2"	7

**FRAME & BODY SPECIFICATIONS**

frame & tongue	body sides & floor	body cross members	body main rails	fenders
8" @ 10 lb/ft I-beam (cold formed)	10 gauge	3" channel	2" x 3" x 3/16" tube	1/8" diamond plate

**AXLE SPECIFICATIONS (rubber ride suspension)**

GVWR	axle
9950	6000 lb - 6 bolt - electric brakes & easy lube spindles
12000	6000 lb - 8 bolt - electric brakes & easy lube spindles
14000	7000 lb - 8 bolt - electric brakes & easy lube spindles
16000	8000 lb - 8 bolt - electric brakes & easy lube spindles

**WEIGHT SPECIFICATIONS by GVWR (gross vehicle weight rating)**

Bumper Pull						Gooseneck				
length	width	9950 GVWR	12000 GVWR	14000 GVWR	16000 GVWR	length	width	12000 GVWR	14000 GVWR	16000 GVWR
10'	73-1/2"	3060 lbs	3320 lbs	n/a	n/a	n/a	n/a	n/a	n/a	n/a
10'	81-1/2"	3340 lbs	3500 lbs	n/a	n/a	n/a	n/a	n/a	n/a	n/a
12'	81-1/2"	3500 lbs	3760 lbs	3900 lbs	4330 lbs	12'	81-1/2"	4350 lbs	4510 lbs	4970 lbs
14'	81-1/2"	n/a	3900 lbs	3990 lbs	4480 lbs	14'	81-1/2"	4660 lbs	4820 lbs	5240 lbs

